


FIG.1

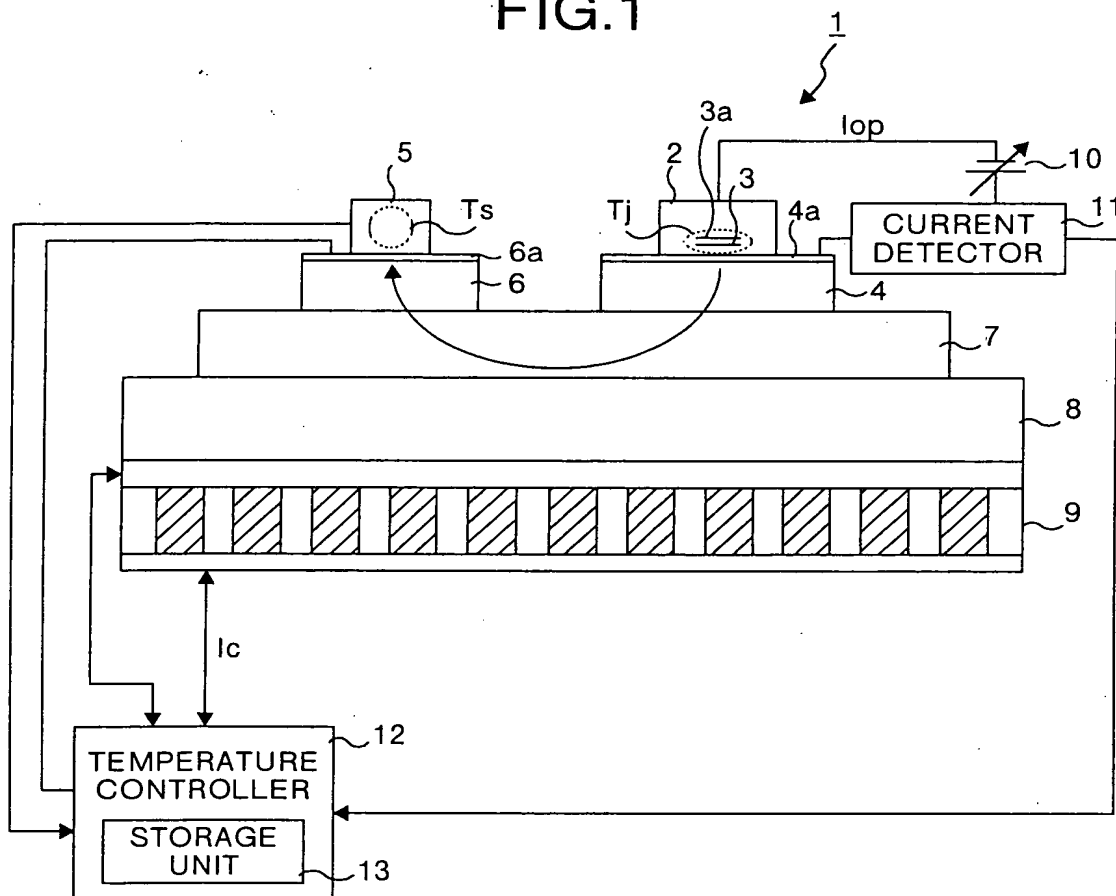

09931257.081701

Figure 1 is a graph showing the temperature (T_s) in degrees Celsius versus the anode current (I_a) in mA. The graph includes several curves: CP1 (solid line with squares), CP2 (solid line with diamonds), CP3 (dashed line with squares), CP1' (dashed line with diamonds), CP2' (dashed line with diamonds), CP3' (dashed line with diamonds), FS1 (solid line), FS2 (solid line), and FS3 (dashed line). The curves show that temperature increases with anode current, and the curves are labeled with their respective parameters.

Figure 3 is a graph showing the oscillation wavelength (nm) versus the operating current (I_{op} [mA]) for a laser system. The y-axis is labeled "OSCILLATION WAVELENGTH (nm)" and ranges from 1497 to 1501. The x-axis is labeled " I_{op} [mA]" and ranges from 0 to 1500. Three data series are plotted:

- $\lambda 1$ (FT1): A dashed line at approximately 1500.1 nm.
- $\lambda 2$ (FT2): A solid line with square markers, fluctuating around 1499 nm.
- $\lambda 3$ (L3): A solid line with diamond markers, increasing from approximately 1497.5 nm at 100 mA to 1500 nm at 1200 mA.

A dashed line for FT3 ($\lambda 3$) is also shown at approximately 1497.6 nm.

FIG.4

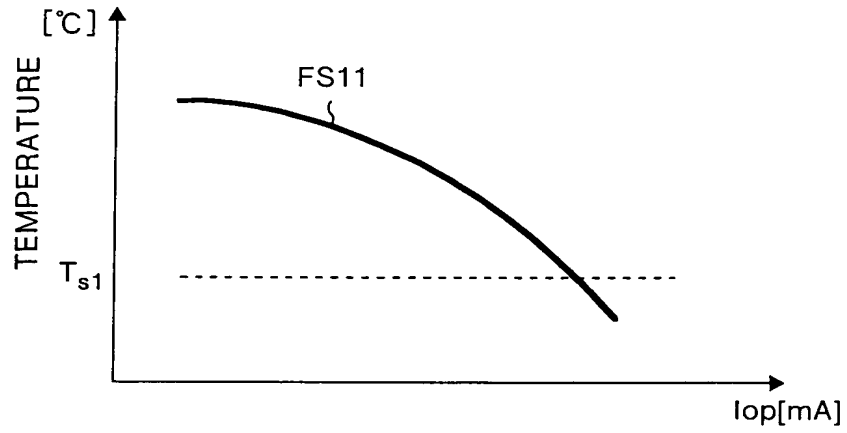


FIG.5


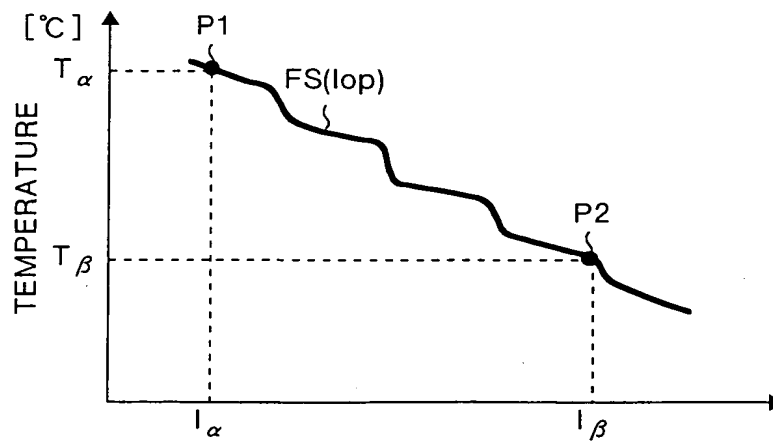


FIG.6

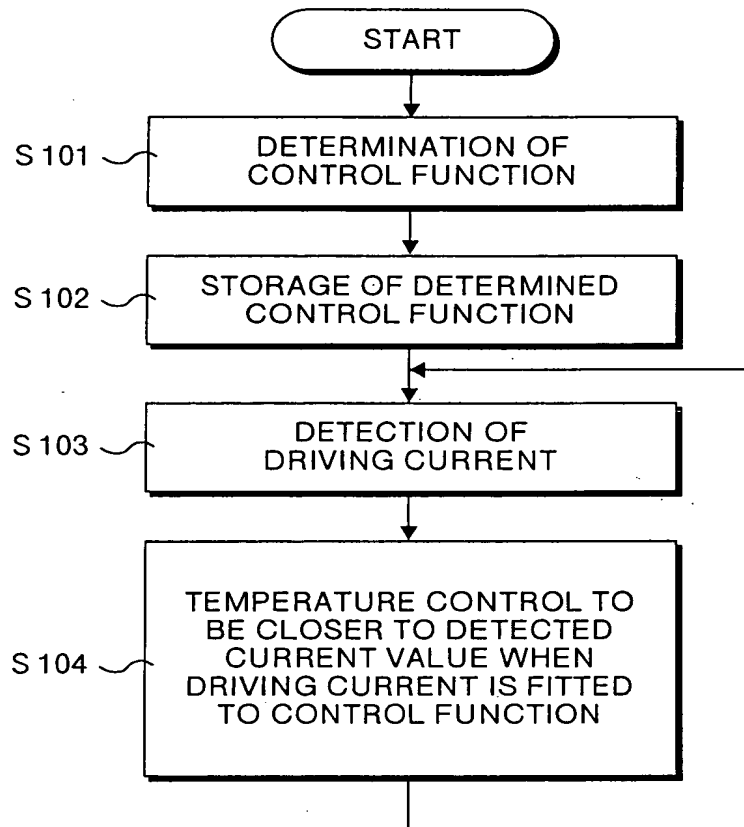

09931257.031701

SECRET

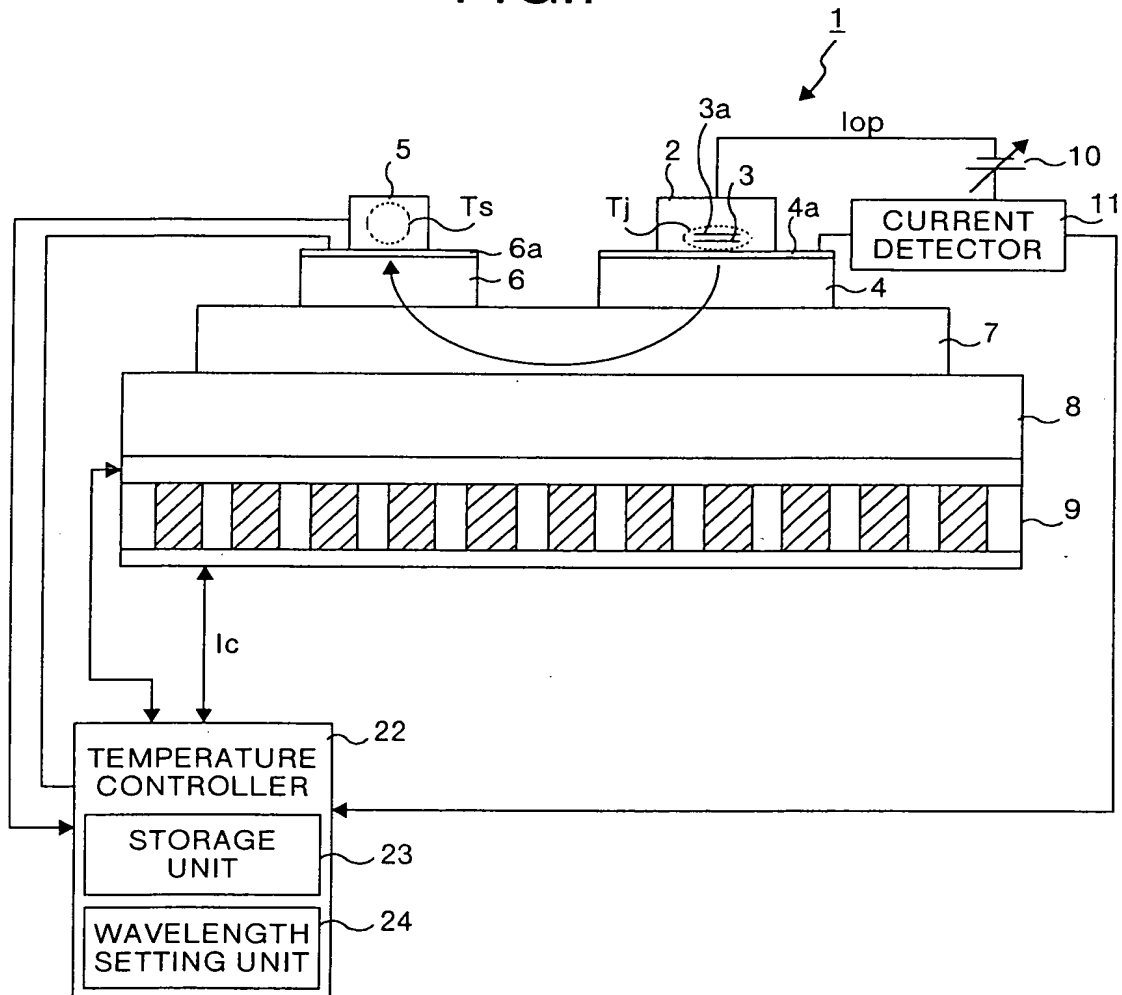


FIG.8


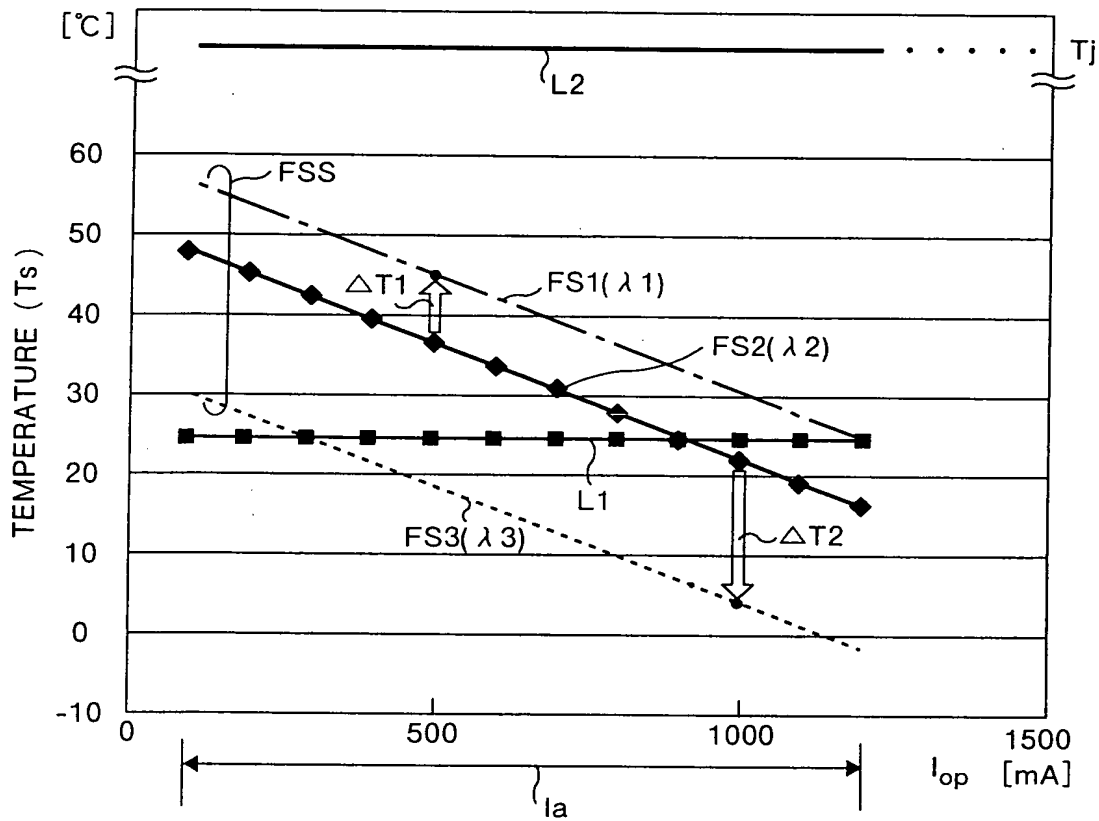


FIG.9

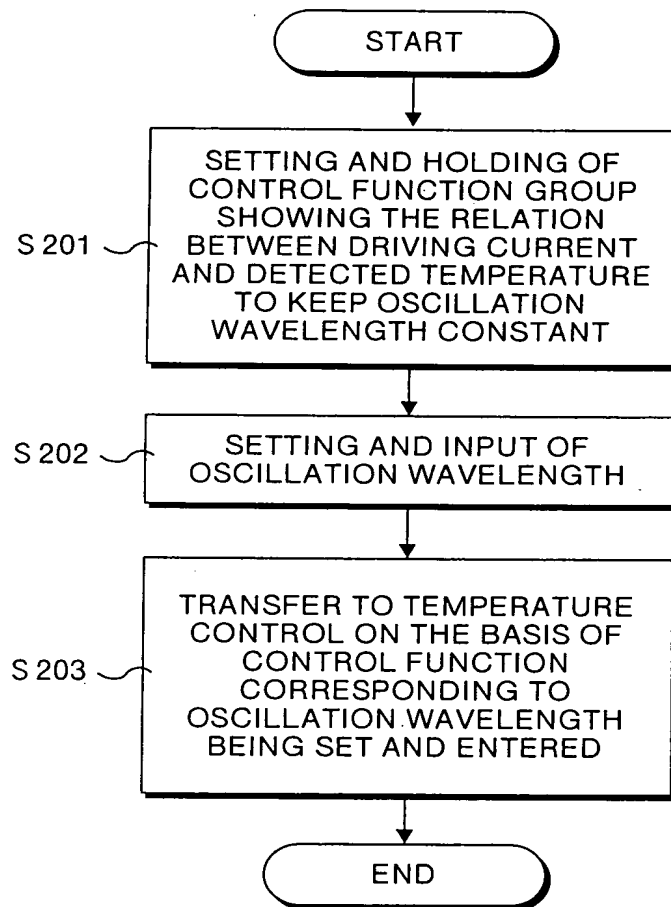

09931257.081701

FIG.10A

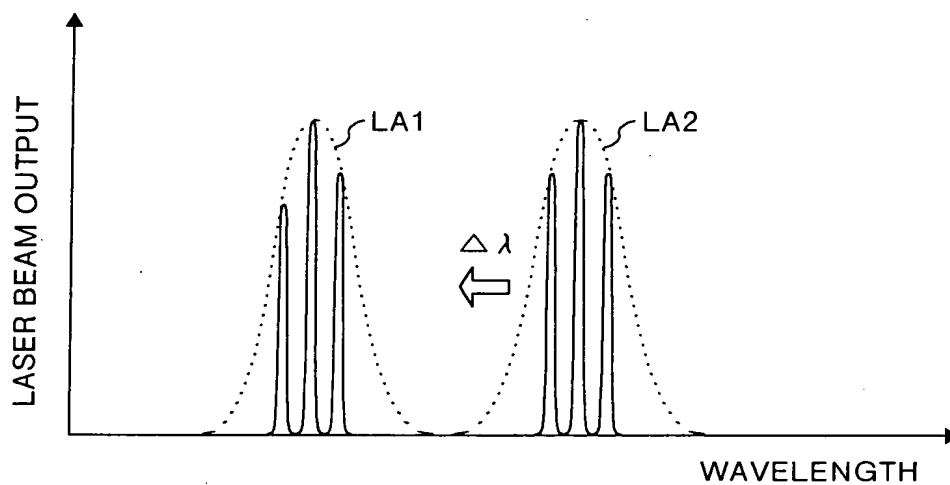


FIG.10B

